


Dehumidifier

DH 7220



FUNCTIONING PRINCIPLES

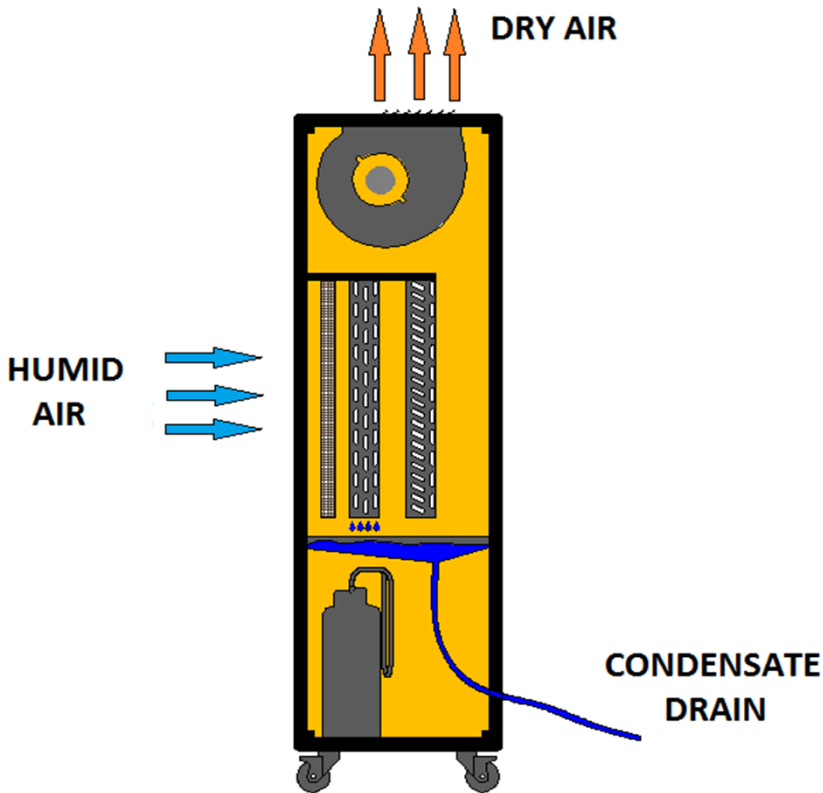

The dehumidifier controls humidity by forcing the excess of moisture to condense from the air into the unit as it passes over the cooling elements. Contact with this cold surface causes the moisture in the air to condense. This condensed water drains safely outside. The dried air then passes through a warmed coil where it is warmed and reenters the room at slightly higher temperature.

TECHNICAL DATA

Capacity (30°C/80%Rh)	l/24h	222,4	Refrigerant	R407C
Working range	°C / %Rh	5-32 / 30-90	Refrigerant mass	g 1730
Net weight	kg	119	Tank capacity	l 15
Gross weight	kg	128	Power supply	V 3N 380-400
Noise level	dBa	72	Frequency	Hz 50
Air flow	m ³ /h	2150	Rated current	A 9,5
			Power consumption	W 4900

PACKING

Package dimensions	mm	805 x 520 x 1650
Device dimensions	mm	742 x 460 x 1604
Pieces per pallet	n°	1
Pallet dimensions	mm	805 x 520 x 1650

COMPONENTS

Compressor	rotary
Fan	centrifugal
Water tank	-
Defrosting system	hot-gas defrosting
Hygrostat	electronic
Others	-

ACCESSORIES

WIRING DIAGRAM

